



# Revolutionizing Urban Energy Landscapes: A Robust Framework for Sustainable Integration through Advanced Smart Grid Architecture

C. Manigandaa<sup>1,\*</sup>, Manikandan Vasanthakumar<sup>1</sup>, C. Manikantaa<sup>1</sup>, Dharanidharan M.<sup>1</sup>, Agnus S.<sup>1</sup>

<sup>1</sup>Department of artificial intelligence and data science ,Panimalar engineering college, India

Emails: [cmanigandaa@gmail.com](mailto:cmanigandaa@gmail.com); [manikandanvk2023@gmail.com](mailto:manikandanvk2023@gmail.com); [cmanikantaa7@gmail.com](mailto:cmanikantaa7@gmail.com)  
[dd1166878@gmail.com](mailto:dd1166878@gmail.com); [agnus040204@gmail.com](mailto:agnus040204@gmail.com)

## Abstract

A smart city coordinates resource allocation to provide a safe, efficient, and good living environment. Smooth integration of advanced technologies optimises resource consumption, notably power control. Optimizing power control includes strategically placing connected devices to optimize electricity utilisation. Intelligent urban environments need recognising this issue and solving it. Multiple solutions are needed for smart city energy optimisation. However, on-going scientific debate attempts to construct a ground-breaking intelligent grid design that can gather electricity from PV, hydro, and thermal sources. A delay-aware delivery system handles the challenging challenge of real-time energy optimisation (ECRT). Optimising energy expenditure in real time matches demand and supply. This project intends to build a smart grid that regulates electrical operations and uses sustainable energy sources. The paper focuses modelling renewable energy and improving energy distribution. We want to boost smart city energy efficiency. The hybrid smart grid proposes an effective energy resource management system that blends numerous energy production sources and real-time energy expenditure optimisation. The harmonious integration of sustainable energy sources and novel control systems improves resource allocation while being sustainable. This insightful study discusses smart energy system concepts and solutions in a technologically sophisticated city. Real-time energy optimisation and sustainable energy sources show an on-going commitment to increasing efficiency, resource utilisation, and sustainable design in intelligent urban environments.

**Keywords:** Sophisticated; Power control; Intelligent urban environments; Harmonious integration

## 1. Introduction:

The discernible trend towards the adoption of sustainable energy sources on a global scale is readily apparent within diverse communities, urban centres, and subnational governing bodies. Numerous stakeholders have engaged in collaborative efforts to formulate comprehensive strategies with the overarching objective of effectuating a paradigm shift in their existing electricity frameworks, thereby transitioning towards a sustainable and environmentally friendly energy infrastructure predominantly reliant on renewable sources. Nevertheless, it is imperative to acknowledge that the prevailing power system engenders formidable obstacles owing to its exorbitant energy conversion procedures and latent imperfections in electrical apparatus. In order to effectively address these aforementioned issues and optimise the utilisation of energy resources, it is imperative to employ a range of methodologies including but not limited to tracking, regulating, and projecting. The optimisation of energy utilisation entails the provision of surplus electrical power to the system while concurrently establishing localised renewable energy (RE) initiatives. This particular approach not only effectively attends to pressing environmental concerns, but also significantly diminishes reliance on non-renewable fossil fuels, thereby ameliorating the inherent uncertainties associated with volatile energy markets. The integration of renewable energy (RE) options into the power system necessitates the implementation of robust monitoring mechanisms and strategic approaches. These encompass the utilisation of power storage devices, the application of operating equilibrium methods, and the exploration of innovative solutions such as hydroelectric power and rechargeable vehicles. The energy technology sector is currently experiencing substantial transformations, with a primary

emphasis on augmenting adaptability, mitigating expenses, and satisfying escalating power requisites. The integration of intelligent urban environments, commonly referred to as smart cities, assumes a pivotal position in the facilitation of the transition towards renewable and sustainable energy alternatives, namely wind and solar power, as a means to supplant conventional energy sources characterised by high emissions. The manuscript places significant emphasis on the optimisation of methodologies aimed at effectively managing the inherent volatility in supply associated with renewable resources, thereby facilitating their seamless integration into the power network while ensuring optimal efficiency. The principal objective entails the minimization of fluctuations in electrical load.

The present scholarly manuscript endeavours to comprehensively examine and elucidate the various sequential phases involved in the assimilation of renewable energy sources into the existing power grid infrastructure, thereby exemplifying the fundamental principles underlying this optimisation methodology. The present study delves into the intricate dynamics surrounding sustainable renewable energy technologies within the context of smart cities. The manuscript is meticulously structured into distinct sections, commencing with a comprehensive examination of antecedent scholarly works pertaining to the subject matter of energy efficiency transitions within the context of smart cities. Subsequently, a novel and innovative solution is presented, followed by a thoughtful discourse on renewable energy sources as they relate to the enhancement of energy efficiency. The paper culminates with a succinct summary of key findings and deductions, as well as a delineation of potential avenues for future research exploration. The present discourse highlights the paramount significance of incorporating sustainable energy alternatives within the framework of smart urban environments.

## **2. Related works:**

Al-Saedi et al. (2013) examine grid-connected microgrid power flow control under changing load conditions. [1] Particle Swarm Optimisation optimises microgrid power flow in this study. Microgrids struggle to maintain electricity flow when demand changes. PSO, an intelligent optimisation method, improves microgrid power flow control. In complicated, ever-changing systems, PSO finds optimal or near-optimal solutions. Power and energy systems are improved by this research. Optimising power flow may enhance grid-connected microgrid performance, especially under changing loads. This study shows how to optimise microgrid efficiency and reliability.

[2] Dasgupta et al. (2013) use a four-switch-based three-phase grid-connected inverter to link renewable energy sources to a generalised unbalanced microgrid. Micro grids are local energy systems that function alone or with the power grid. The project designs and implements an inverter system to link renewable energy to the micro grid. In this generalised unbalanced microgrid research, the four-switch-based three-phase grid-connected inverter is thoroughly tested. When power system phases have uneven load or output, imbalances occur. IEEE Transactions on Industrial Electronics improves microgrid and power electronics. Certain inverter designs connect renewable energy to microgrids. In unbalanced situations, the findings may assist build and improve microgrid systems.

Durairasan and Balasubramanian (2020) propose a control method to improve renewable energy flow to a typical three-phase microgrid. The Squirrel Search Algorithm (SSA) and Whale Optimisation Algorithm (WOA) are combined to improve microgrid power flow in the article. The paper examines optimal power flow regulation for microgrid stability and efficiency. Optimizers solve complicated problems efficiently using the Squirrel Search and Whale Optimisation Algorithms. [3] These algorithms improve microgrid power flow management in the suggested control method. This Transactions of the Institute of Measurement and Control study improves microgrid control systems by integrating renewable energy. The hybrid technique presented in the research may increase power flow and efficiency in generalised three-phase microgrids.

[4] Elsieid et al. (2016) examined microgrid power solutions' best economic and environmental performance. Microgrids are popular for their energy efficiency and environmental friendliness. To optimise functionality, the research includes economic and environmental elements. The authors strive to reconcile microgrid power system economic cost and environmental impact. An optimisation challenge that reduces operational costs and carbon emissions or other environmental impacts may be defined in the study. To optimise the microgrid, mathematical models and algorithms may detect the ideal operating circumstances. Energy Conversion and Management study optimises energy systems. The study helps determine microgrid power system sustainability and cost-effectiveness by considering economic and environmental considerations. This research is essential for green energy efficiency.

[5] In particular, Eltamaly et al. (2017) study smart grid load management and hybrid renewable energy system size and design. Modern technology controls electricity generation, distribution, and consumption in smart grids.

Load management, a smart grid function, is examined in hybrid renewable energy system size and design. Load management may be investigated to improve hybrid renewable energy systems. Demand patterns, renewable energy availability, and storage capacity must be addressed when dynamically altering electrical needs. The research optimises hybrid renewable energy system size and construction using intelligent load management. Engineering Optimisation shows how load management improves hybrid renewable energy systems. This research is crucial for smart grid and renewable energy sustainability, reliability, and profitability.

M. M. Hossain, K. R. Zafreen, A. Rahman, M. A. Zamee, and T. Aziz reported a successful residential load-focused smart grid demand-side management algorithm in 2017. Consumer-facing demand-side management optimises and controls electricity use in smart grid technologies. It improves residential demand-side management using an algorithm. The writers likely propose and evaluate a smart grid home load control algorithm, demonstrating their expertise. [6] It optimises energy utilisation, decreases peak demands, and increases grid reliability. The algorithms optimise energy usage, save money, and increase electricity dependability. Advanced electrical engineering and smart grid technologies benefit from important international conference research. It illuminates smart grid algorithmic methods for residential load demand-side control optimisation. This research improves power system energy management intelligence and efficiency.

[7] X. Jiang and C. Xiao (2019) use operational power and a genetic algorithm to manage household energy usage. The IEEE Access study may concentrate on genetic algorithm-based domestic energy control. Research is anticipated on a genetic algorithm-based method to optimise household appliances and gadgets for energy efficiency, cost, and user preferences. Evolutionary genetic algorithms are based on natural selection. They commonly address optimisation problems. Study improves smart home technologies and energy management. The research optimises residential energy usage, saves money, and may stabilise power systems using evolutionary algorithms. Optimisation of residential energy utilisation in smart networks and sustainable energy practices makes this subject crucial.

T. Sattarpour, D. Nazarpour, and S. Golshannavaz (2018) propose a complete house Energy Management (HEM) method for smart house energy efficiency. According to Sustainable Cities and Society, improving smart home energy use may enhance microgrid operation via collaboration. The writers may discuss smart home energy scheduling, including cost reduction, energy efficiency, and microgrid operation. According to a scholarly source [8], smart houses collaborate to optimise energy consumption patterns, improving microgrid stability and efficiency. This study is crucial to sustainable urban development, especially in smart cities and microgrids. The suggested multi-objective HEM method balances home goals with microgrid needs. Such research are essential for understanding and implementing collaborative energy management techniques in smart and sustainable cities.

Renewable energy and storage are used to improve a Home Energy Management System (HEMS). Energies research may produce a system that controls residential energy consumption by integrating renewable energy generation and storage. [9] The writers may recommend improving solar panels and batteries for residential renewable energy. The goal is to improve energy efficiency, cut expenses, and utilise renewable energy in the home. The research improves energy management and sustainable technologies. A HEMS designed for renewable energy and storage decreases dependence on traditional power sources and enhances home energy system efficiency. These studies are necessary for households to embrace smart, eco-friendly energy solutions.

H. Nguyen, C. Zhang, and M. A. Mahmud (2014) [10] explore efficient EV charging and discharging to improve grid renewable energy. The IFAC Proceedings Volumes may study power grid-electric vehicle management. We want better renewable energy integration the authors may examine electric vehicle smart charging and discharging algorithms using grid renewable energy. This may involve modifying electric vehicle charging and discharging schedules for wind and solar power fluctuations. This research aids smart grid integration and sustainable mobility. Intelligent electric vehicle charging and discharge may safeguard grid stability, support renewable energy, and encourage sustainable transportation. The study illuminates grid-integrating electric vehicle perks and downsides, improving renewable energy.

### **Efficiency of renewable energy:**

The intricate endeavour of introducing and amending legislation to foster the implementation of renewable energy (RE) necessitates the continuous assessment of a myriad of factors, encompassing social, cultural, technical, and environmental dimensions. Numerous nations are fervently involved in the diligent assessment and meticulous amendment of extant legal frameworks, thereby accentuating the intricacy and paramount of embracing sustainable energy methodologies. The endorsement of sustainable energy holds immense potential and a plethora of benefits, albeit not without encountering obstacles that manifest themselves on a global and

regional scale. The formidable challenge of limited investment in green energies arises from the considerable initial operational expenditures, which impede the progress of these endeavours. Furthermore, the fruition of potential benefits derived from such ventures may be subject to temporal delays. The comprehensive resolution of challenges pertaining to wind and solar energy necessitates a thorough consideration of various subjective factors, while also accounting for cost-saving measures when deemed appropriate. The aforementioned challenges possess the potential to exert a substantial influence on the holistic system, extending beyond the mere fiscal implications associated with the installation and upkeep expenditures of the power generation network.

Hydropower, while exhibiting a commendable level of integration within contemporary endeavours, regrettably manifests a constrained potential for further expansion and advancement. Renewable resources, including but not limited to tide, wind, water, and geothermal sources, encounter certain limitations with regards to their relative abundance and capacity for extraction. Furthermore, it is imperative to acknowledge that energy conservation is frequently regarded as a supplementary energy reservoir, and its examination within the framework of augmented output capacity shall be expounded upon herein. In order to effectively tackle these challenges, it is imperative to adopt a comprehensive and integrated approach that takes into account the intricate interplay between economic, environmental, and technical dimensions. In light of the escalating global endeavours aimed at achieving sustainable energy, it becomes imperative to underscore the significance of continuous assessments and modifications to legislative frameworks. Such endeavours are indispensable in fostering the pervasive integration of renewable energy alternatives.

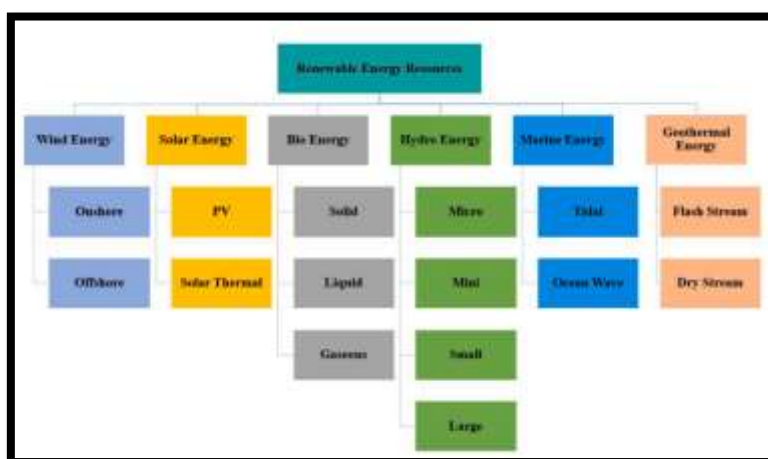


Figure 1: Renewable energy types for energy efficiency.

The profound ramifications of environmental change are exerting a substantial influence on the intricate dynamics of the Earth's climate system, thereby engendering a pivotal juncture for the trajectory of human civilization. The electricity supply industry, predominantly propelled by power generation facilities, is responsible for a substantial portion, approximately 75%, of the global carbon dioxide (CO<sub>2</sub>) emissions. In light of the pressing imperative to achieve sustainable development, numerous nations are currently devising comprehensive frameworks aimed at facilitating the pervasive integration of renewable energy (RE) sources. The aforementioned frameworks encompass strategic roadmaps aimed at the attainment of sustainability objectives, as well as national strategies devised to facilitate the seamless integration of renewable energy sources.

The phenomenon of global energy consumption is currently undergoing a substantial escalation, and prognostications indicate that the cumulative global energy requisites will surpass twofold by the year 2030, with the specific demand for power anticipated to nearly triple in relation to its present state. The burgeoning need at hand necessitates a comprehensive examination of the pivotal role that technological advancements have assumed in rendering the harnessing of natural resources for energy production a more viable endeavour. The transition towards renewable energy is widely regarded as an indispensable element in the amelioration of the ecological ramifications associated with conventional energy sources, as well as the curtailment of carbon emissions. In the pursuit of establishing sustainable energy frameworks, it is anticipated that the incorporation of renewable energy technologies will assume a critical position in the reconfiguration of the forthcoming energy panorama.

### 3. Proposed Method:

The intelligent urban network has discerned fundamental objectives, with the intention of establishing a shared paradigm for assessing medium-to-long-term strategies pertaining to environmental and energy preservation within small to medium-sized communities. The advancement of diverse specifications encompasses the delineation of technological functionalities for the intelligent urban infrastructure, accomplished through a synergistic process involving municipalities, experts in modelling, computer scientists, relevant stakeholders, and providers of energy resources. The pursuit of a comprehensive comprehension among various stakeholders within the community is being undertaken in order to establish a functional framework that takes into account all viable criteria. The facilitation of renewable generation advancements is actively promoted by solution developers with the aim of expanding the requisite infrastructure for power generation. In light of the global phenomenon of smart city development, it is imperative to acknowledge the inherent diversity among various communities, necessitating city administrations to tailor their strategies and endeavours in order to effectively address their distinct requirements.

The present scholarly manuscript endeavours to expound upon the subject matter pertaining to the integration of technological solutions, with the overarching objective of augmenting network performance, ensuring resource stability, and facilitating the expansion of energy storage capabilities for applications situated in off-grid environments. A comprehensive analysis of the present condition pertaining to modelling, optimisation, and management systems employed in the operation of distribution systems provides valuable insights for devising a growth strategy aimed at enhancing the alignment between demand and generation during the production phase. Figure 2 elucidates the novel contemporary grid, intricately interlinked with all sources, thereby furnishing a more astute, expeditious, and efficacious methodology to cater to the burgeoning electricity requisites. The underlying infrastructure serves as a critical enabler for prominent production industries, facilitating judicious decision-making processes and facilitating resolute actions aimed at fostering the development of a dynamic and fruitful economy in the forthcoming decade. The primary focus lies in ascertaining the most optimal load routing patterns within pre-established boundaries and anticipated outcomes.

The populace is deemed to have established the operational boundaries of their burdens prior to arranging, thereby enabling the optimisation algorithm to discern optimal resolutions within the confines. The present inquiry concerns the contemplation of numerous loads that have been meticulously arranged to occur within a specified temporal interval denoted as "t." Each load is accompanied by a distinct energy requirement, denoted as  $E_i$ . It is important to note that the energy requirements of these loads are subject to certain constraints, namely the lower bound  $E_{min}$  and the upper bound  $E_{max}$ , which respectively represent the minimum and maximum values for the energy required.  $T_c$  denotes the temporal duration necessary to complete a full revolution within a 24-hour temporal framework. The symbol  $c$  signifies an individual hourly cycle, while Time  $T$  designates a designated temporal interval. The variables  $B_{ti}$  and  $F_{ti}$  serve as the initial and terminal boundaries, respectively, encapsulating the temporal intervals within which the system is executed.

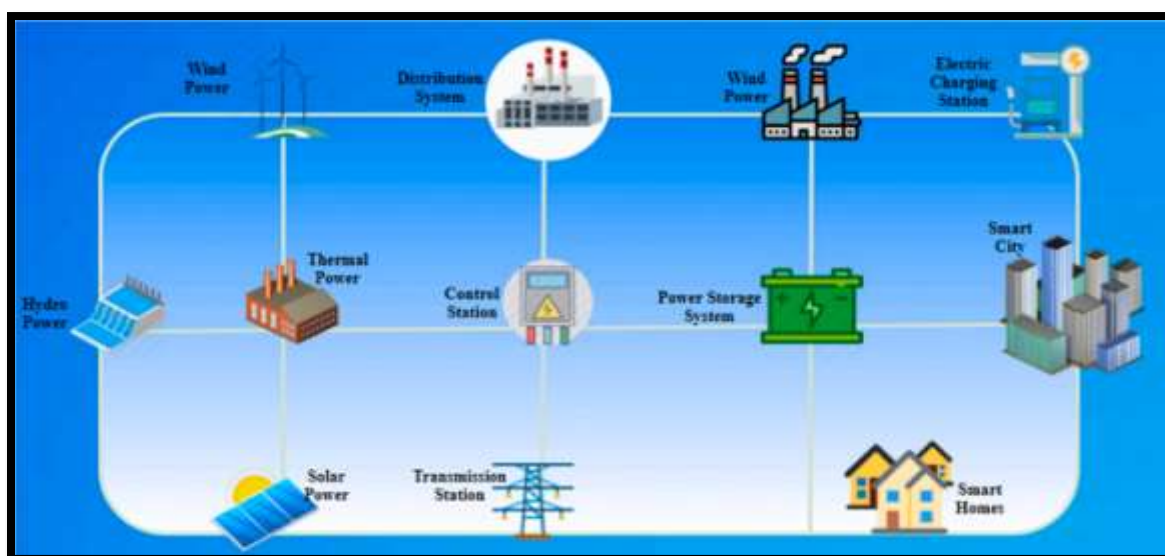


Figure 2: Smart City and Efficient Design for Integrated Grid.

Furthermore, we establish the temporal parameters for the initiation of the operational activities.

$$T_i \in [B_{ti}, F_{ti}] \quad (1)$$

The Factor of Latency (FoL) serves as a discriminant between the frequencies of two instances, taking into account the temporal duration of their respective operations (OT). Within the confines of this particular strategic approach, our primary objective is to mitigate the duration of time that is typically required for intelligent systems to undergo enhancements, thereby engendering a heightened level of operational effectiveness.

$$FoL_i = \frac{T_i - B_{ti}}{E_{ti} - OT - B_{ti}} \quad (2)$$

The First-order Logic (FoL) shall be characterised by the assignment of numerical values, specifically 1 and 0, to represent its high and low states, respectively. In the initial temporal epoch, the temporal magnitude of any given domestic apparatus is denoted as  $B_{ti}$ , wherein the subscript 'i' represents the specific appliance under consideration. Consequently, upon the commencement of the subsequent temporal phase, the temporal magnitude of the aforementioned appliance, denoted as FoL, shall assume a value of zero. At the onset, assuming an initial energy level denoted as  $E_i$ , the First Order Logic (FoL) will manifest as unity. The aggregate sum of the cost of the first component, denoted as FoL, in conjunction with the expenditure incurred during the waiting period, can be ascertained through a computational process.

$$w^{FoL_i} = \frac{(\zeta_i)^{B_{ti}-C}}{P_i^{T_i}} \quad (3)$$

The subsequent model delineates the waiting constraint applicable to each operating device  $i \in D_i$ . The augmentation of the parameter  $\zeta_i$  will inevitably lead to an escalation in the expenditure incurred for the purpose of preparation.

$$\sum_{t=1}^{T_c} \sum_{i \in D_i} (w_i^{FoL}) (x_i^{(c)}) \quad (4)$$

In this context, it is imperative to mitigate the rate of energy consumption and curtail the financial implications associated with the latency factor. Through the process of modifying the configuration, the manipulator is able to exercise control over the temporal dimension. By strategically setting the value of  $\zeta_i$  to 1 for each operation  $i$ , the manipulator is able to effectively minimise the expenses associated with power consumption. Consequently, this manipulation of the scheduling process yields a modified schedule that is optimised in terms of cost reduction.

$$S_i = \frac{\zeta_i - B_{ti}}{E_{ti} - B_{ti}} \quad (5)$$

An optimisation problem is being run to minimise energy use while maintaining user comfort and decreasing waiting times. The goal is to reduce energy usage and find ideal energy schedules for the growing device to reduce costs and environmental impact. This research analyses 24-hour energy expenditure to save costs by regulating energy utilisation. Operationally, hourly expenditure is the cost per unit of time, usually in hours. This indicator quantifies the hourly cost of using resources or services.

$$Cost_{total}^T = \sum_{i \in D_i, AL-OL} E_{i, AL} * EUP \quad (6)$$

In the context of the given scenario, it is imperative to denote that AL represents the actual load, while OL signifies the output load. Additionally, EUP stands for the energy unit price. Henceforth, the primary aim of the objective function resides in the minimization of energy costs.

$$\text{Min} (\text{Cost}_{\text{total}}^T) \quad (7)$$

The data analysis indicates a notable reduction in electricity expenses. It shows that when there is high usage with a minimum Energy Usage Profile (EUP), it leads to lower prices. On the other hand, when there is high EUP with maximum utilisation, the costs are higher. The moderate state is characterised by a high level of consumption and the lowest level of EUP. Through meticulous analysis, the proposed system has been optimised to accommodate various loads, ensuring a reliable and efficient operation by minimising peaks and maximising overall performance. Given the rapid expansion of the human population, there has been a corresponding surge in electricity consumption. Unfortunately, conventional power supplies are proving inadequate to keep up with this escalating demand. The implementation of the smart grid (SG) is a direct response to this necessity.

The current research on commodity markets and associated demand can be categorised into two primary channels. The initial type of research centres on optimising energy usage plans for utility users in response to retail market demand. The potential smart grid is envisioned as a hybrid infrastructure, connecting electricity users to both suppliers and local utility infrastructure. Local energy platforms are essential for facilitating energy exchanges between users and distributed energy vendors, which helps create a more responsive and efficient system. Micro-grids in metropolitan areas are frequently seen, with residential homes and businesses having on-site electricity supplies and access to centralised resources such as electric vehicles. The objectives of power management in smart grids encompass minimising electricity costs, optimising the peak-to-optimal ratio, maximising user comfort, reducing consolidated energy consumption, and integrating renewable energy sources. Residential areas are consuming a substantial amount of energy, and their energy consumption is increasing.

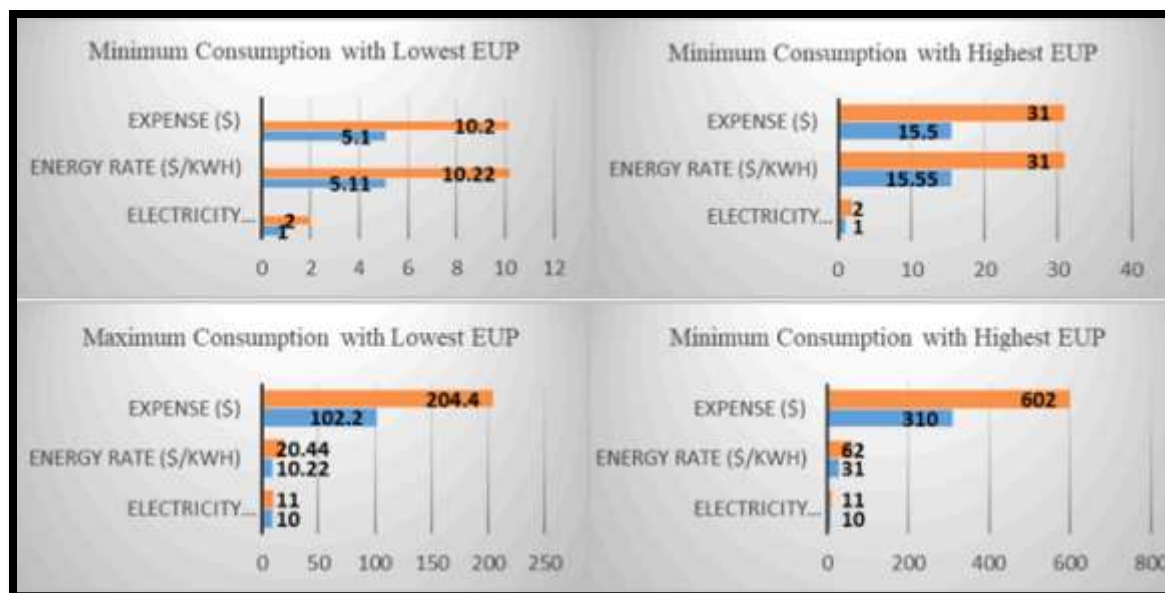


Figure 3: Illustration of cost outcomes with different utilization

The operational challenge in smart city infrastructure involves finding the right balance between the operating cost of a power station connected to a renewable energy source and a storage unit linked to the main grid. The framework offers control over the storage device, however, deterministic techniques are considered inadequate for the intricate and unpredictable characteristics of renewable energy resources. The synchronisation of grids in real-time presents significant challenges due to the direct influence of actions on future states and potential measures. Optimisation at a high-definition level, with a strong emphasis on the dimensionality of iterative algorithms, has rendered classical deep learning algorithms impractical for use in current architectures. Egypt's government has launched a comprehensive roadmap for 2035, with a focus on maximising the potential of renewable energy and enhancing the infrastructure of the transmission system. The objective is to achieve a 20% power generation from renewable sources by 2022, with a subsequent increase to 42% by 2035. This will effectively decrease our dependence on fossil fuel-fired plants. In a hypothetical rural community in Western Australia, a grid powered entirely by renewable energy was proposed. This innovative system would combine solar PV farming with cutting-edge energy storage technologies. The study aimed to optimise the system's overall costs, taking into accounts various parameters and limitations.

Hybrid grid networks, which combine renewable energy sources, offer a reliable electricity supply with minimal maintenance expenses in comparison to traditional power plants. They excel in diverse situations, seamlessly adapting power generation to connected devices. Adopting sustainable procurement approaches is crucial for enhancing hybrid grid architecture. One of the challenges involves the monitoring and synchronisation of different energy sources. Another issue is the potential lifespan of batteries, which can be affected by external factors. Additionally, there are limitations on the types of devices that can be connected to a hybrid grid. Continual research and development play a vital role in tackling electricity production challenges and driving progress in hybrid grid solutions.

#### 4. Conclusion

One of the goals of a smart city is to provide its residents with a living environment that is not only secure and efficient but also of high quality via the coordination of resource allocation. Optimisation of resource utilisation, particularly in the management of power, is achieved via the seamless integration of advanced technologies. The process of optimising power control includes strategically organising connected equipment in order to optimise the amount of electrical energy that is used. One of the most important aspects of the creation of intelligent urban settings is the realisation that this issue has to be handled. It is necessary to acknowledge numerous possibilities in order to optimise energy consumption in smart cities. On the other hand, the on-going academic debate is geared towards the development of a ground-breaking intelligent grid design that is capable of collecting electrical energy from a wide range of sources, such as photovoltaic (PV), hydro, and thermal power. It is a delivery system that tackles the difficult challenge of real-time energy optimisation (ECRT) while taking delay into consideration. This innovation is a delivery system. Adjusting energy expenditure in real time to demand and supply is what real-time energy optimisation does. The objective of this project is to develop a smart grid architecture that is capable of efficiently managing electrical operations and incorporating a wide range of resources that are environmentally friendly. The essay has a focus on making an energy distribution system as efficient as possible and models sustainable energy that comes from natural sources. Increasing the energy efficiency of smart cities is one of our primary objectives. As it has been suggested, the hybrid smart grid is a framework for the effective management of energy resources that incorporates the many features of energy production sources and the optimisation of real-time energy expenditures. The purpose of the system is to enhance resource allocation while maintaining a commitment to sustainability. This will be accomplished via the harmonious blending of sustainable energy sources and novel control mechanisms. In the context of a technologically evolved urban environment, this erudite essay provides an explanation of the ideas and solutions behind new intelligent energy systems. In intelligent urban environments, real-time energy optimisation and the use of sustainable energy sources are examples of an on-going commitment to enhancing performance, reducing resource consumption, and promoting sustainable design.

#### References

- [1] Al-Saedi, W., S. Lachowicz, D. Habibi, and O. Bass. 2013. Power flow control in grid-connected microgrid operation using particle swarm optimization under variable load conditions. *International Journal Of Electrical Power & Energy Systems* 49:76–85. doi:10.1016/j.ijepes.2012.12.017.
- [2] Dasgupta, S., S. Mohan, S. Sahoo, and S. Panda. 2013. Application of four-switch-based three-phase grid-connected inverter to connect renewable energy source to a generalized unbalanced microgrid system. *IEEE Transactions on Industrial Electronics* 60 (3):1204–15. doi:10.1109/tie.2012.2202350.
- [3] P. Kavitha, R. Subha Shini, R. Priya. "An Implementation Of Statistical Feature Algorithms For The Detection Of Brain Tumor." *Journal of Cognitive Human-Computer Interaction*, Vol. 1, No. 2, 2021, PP. 57 - 62.
- [4] Durairasan, M., and D. Balasubramanian. 2020. An efficient control strategy for optimal power flow management from a renewable energy source to a generalized three-phase microgrid system: A hybrid squirrel search algorithm with whale optimization algorithm approach. *Transactions Of The Institute Of Measurement And Control* 42 (11):1960–76. doi:10.1177/0142331220901628.
- [5] Elsied, M., A. Oukaour, H. Gualous, and O. Lo Brutto. 2016. Optimal economic and environment operation of micro-grid power systems. *Energy Conversion And Management* 122:182–94. doi:10.1016/j.enconman.2016.05.074.
- [6] Eltamaly, A., M. Mohamed, M. Al-Saud, and A. Alolah. 2017. Load management as a smart grid concept for sizing and designing of hybrid renewable energy systems. *Engineering Optimization* 49 (10):1813–28. doi:10.1080/0305215x.2016.1261246.
- [7] M. M. Hossain, K. R. Zafreen, A. Rahman, M. A. Zamee and T. Aziz, "An effective algorithm for demand side management in smart grid for residential load", *Proc. 4th Int. Conf. Adv. Electr. Eng. (ICAEE)*, pp. 336-340, Sep. 2017.

- [8] X. Jiang and C. Xiao, "Household energy demand management strategy based on operating power by genetic algorithm", *IEEE Access*, vol. 7, pp. 96414-96423, 2019.
- [9] T. Sattarpour, D. Nazarpour and S. Golshannavaz, "A multi-objective HEM strategy for smart home energy scheduling: A collaborative approach to support microgrid operation", *Sustain. Cities Soc.*, vol. 37, pp. 26-33, Feb. 2018.
- [10] H. Nguyen, C. Zhang and M. A. Mahmud, "Smart charging and discharging of electric vehicles to support grid with high penetration of renewable energy", *IFAC Proc. Volumes*, vol. 47, no. 3, pp. 8604-8609, 2014.
- [11] Najafi-Ghalelou, S. Nojavan and K. Zare, "Information gap decision theory-based risk-constrained scheduling of smart home energy consumption in the presence of solar thermal storage system", *Sol. Energy*, vol. 163, pp. 271-287, Mar. 2018.
- [12] S. Lee, J. Lee, H. Jung, J. Cho, J. Hong, S. Lee, et al., "Optimal power management for nanogrids based on technical information of electric appliances", *Energy Buildings*, vol. 191, pp. 174-186, May 2019.
- [13] X. Wu, X. Hu, Y. Teng, S. Qian and R. Cheng, "Optimal integration of a hybrid solar-battery power source into smart home nanogrid with plug-in electric vehicle", *J. Power Sources*, vol. 363, pp. 277-283, Sep. 2017.
- [14] V. Mnih, H. Larochelle and G. Hinton, "Conditional restricted Boltzmann machines for structured output prediction", *Proc. Int. Conf. Uncertainty Artif. Intell.*, pp. 1-9, 2011.
- [15] F. K. Arabul, A. Y. Arabul, C. F. Kumru and A. R. Boynuegri, "Providing energy management of a fuel cell–battery–wind turbine–solar panel hybrid off grid smart home system", *Int. J. Hydrogen Energy*, vol. 42, no. 43, pp. 26906-26913, 2017.
- [16] Murugaperumal K, Ajay P, Vimal Raj D (2019) Energy storage based MG connected system for optimal management of energy: An ANFMDA technique. *International Journal of Hydrogen Energy* 44(16): 7996–8010.
- [17] Sonia Jenifer Rayen. "Survey On Smart Cane For Visually Impaired Using IOT." *Journal of Cognitive Human-Computer Interaction*, Vol. 1, No. 2, 2021 ,PP. 81 - 85.
- [18] Najafzadeh K, Heydari H (2012) New inverter fault current limiting method by considering microgrid control strategy. *Advanced Materials Research* 463: 1647–1653.
- [19] Palizban O, Kauhaniemi K, Guerrero J (2014) Microgrids in active network management—Part I: Hierarchical control, energy storage, virtual power plants, and market participation. *Renewable and Sustainable Energy Reviews* 36: 428–439.
- [20] Prakash S, Sinha S (2014a) Simulation based neuro-fuzzy hybrid intelligent PI control approach in four-area load frequency control of interconnected power system. *Applied Soft Computing* 23: 152–164.
- [21] Selva Santhos Kumar R, Girirajkumar S (2015) Z-source inverter fed induction motor drive control using particle swarm optimization recurrent neural network. *Journal of Intelligent & Fuzzy Systems* 28(6): 2749–2760.
- [22] Shahvari O, Logendran R (2017) An Enhanced tabu search algorithm to minimize a bi-criteria objective in batching and scheduling problems on unrelated-parallel machines with desired lower bounds on batch sizes. *Computers & Operations Research* 77: 154–176.
- [23] Sowmiya U, Uma G (2017) Control and maximum power tracking operation of hybrid excited variable speed induction generator. *Electric Power Systems Research* 143(2): 771–781.
- [24] Thao N, Uchida K (2016) A control strategy based on fuzzy logic for three-phase grid-connected photovoltaic system with supporting grid-frequency regulation. *Journal of Automation and Control Engineering* 4(2): 96–103.
- [25] Zhang L, Yi Z, Amari S (2018) Theoretical study of oscillator neurons in recurrent neural networks. *IEEE Transactions on Neural Networks and Learning Systems* 29(11): 5242–5248.