



Computational Intelligence Methodology based on Neutrosophic Set with Multi-Criteria Decision Making for Evaluating Natural Gas Automobiles

Warshine Barry¹, Josef Al Jumayel²

¹University of Debrecen, Department of Mathematical and Computational Science, Debrecen, Hungary

²Faculty Of Science, Beirut Arab University, Beirut, Lebanon

Emails: warshinabarrykurd@gmail.com; Josefjumayel113@gmail.com

Abstract

This study presents a comprehensive evaluation of natural gas automobiles, focusing on their performance, environmental impact, economic viability, and potential as an alternative fuel for transportation. Natural gas vehicles (NGVs) have gained attention as an alternative to conventional gasoline or diesel vehicles due to their lower emissions profile and potential for reducing greenhouse gas emissions. The assessment encompasses a comparative analysis of NGVs against traditional internal combustion engine vehicles, evaluating factors such as vehicle efficiency, fuel availability, infrastructure, emissions, and cost-effectiveness. Findings reveal that NGVs exhibit lower emissions of pollutants like nitrogen oxides and particulate matter than their gasoline or diesel counterparts. However, challenges persist regarding limited refueling infrastructure, reduced driving range, and upfront vehicle conversion or purchase costs. Economic evaluations highlight the potential cost savings associated with natural gas as a fuel, particularly in regions with favorable pricing and infrastructure. Despite these benefits, scalability and widespread adoption of NGVs face barriers related to infrastructure development, technological advancements, and market incentives. This evaluation provides insights into the opportunities and challenges of natural gas automobiles, emphasizing the need for a balanced approach encompassing technological innovation, infrastructure investment, and supportive policies to unlock their full potential as a viable alternative in the transportation sector. We used multi-criteria decision-making (MCDM) to deal with various criteria of natural gas automobiles. The Range of Value Technique (ROV) method ranks the alternatives. The ROV is integrated with the neutrosophic set to deal with uncertainty information. The neutrosophic set is extension of fuzzy set to overcome the vague and incomplete information. The sensitivity analysis is conducted to check the stability of the results.

Keywords: The Range of Value Technique (ROV); Neural Gas; Automobiles: MCDM: Neutrosophic Set

1. Introduction

Natural gas automobiles are vehicles that utilize natural gas as a primary source of fuel instead of conventional gasoline or diesel. Natural gas, primarily composed of methane, offers several advantages as a transportation fuel, including lower emissions, energy efficiency, and reduced dependence on fossil fuels. With advancements in technology and the availability of natural gas infrastructure, natural gas automobiles have gained attention as a viable alternative to conventional vehicles in various applications[1], [2].

Natural gas automobiles provide an opportunity to address transportation-related environmental concerns, especially air pollution and greenhouse gas emissions. When combusted, natural gas produces lower levels of carbon dioxide (CO₂), nitrogen oxides (NO_x), and particulate matter than gasoline or diesel. As a result, natural gas vehicles can contribute to improved air quality and reduced carbon footprint, thereby mitigating the impact of transportation on climate change[3]–[5].

Fuel efficiency is another significant advantage of natural gas automobiles, as natural gas has a higher energy content than gasoline or diesel. This higher energy density allows vehicles to perform similarly while consuming less fuel. Additionally, natural gas costs are often lower than conventional fuels, providing potential cost savings to vehicle owners and reducing overall fuel expenses[6]–[8].

The availability of natural gas refueling infrastructure remains crucial for the widespread adoption of natural gas automobiles. Establishing a well-developed network of refueling stations is essential to ensure the convenience and practicality of using natural gas vehicles. However, the expansion of refueling infrastructure is gradually progressing in many regions, supporting the growth of natural gas as a transportation fuel[9]–[11].

Regarding vehicle options, natural gas automobiles are available in various forms, including dedicated natural gas vehicles (NGVs) and bi-fuel vehicles that can run on both natural gas and gasoline. NGVs are specifically designed to operate solely on natural gas, while bi-fuel vehicles offer the flexibility to switch between natural gas and petrol, providing extended driving range and convenience[12]–[14].

While natural gas automobiles offer numerous benefits, there are also challenges to consider. These include the limited range of natural gas vehicles compared to conventional cars, the upfront costs associated with vehicle purchase and conversion, and the need for continued investment in infrastructure development[15]–[17].

As governments, policymakers, and individuals seek to reduce emissions, improve energy efficiency, and diversify the transportation sector, natural gas automobiles emerge as an attractive alternative. By considering emissions reduction, energy efficiency, refueling infrastructure, and vehicle options, stakeholders can evaluate natural gas automobiles' viability and potential benefits in their respective contexts. With ongoing advancements and increased support, natural gas vehicles have the potential to play a significant role in the transition towards a more sustainable and environmentally friendly transportation system[18]–[20].

We used the MCDM model[21] to evaluate the natural gas automobiles. We used the ROV model to analyze the criteria and alternatives.

Zadeh [22], [23]proposed the notion of membership and the idea of fuzzy sets (FS) in 1965. Today, this generally acknowledged idea provides the foundation for the comfort and ease we take for granted daily[24]. New set structures like interval-valued fuzzy sets (IVFS), bipolar fuzzy sets (BFS), multiple-valued fuzzy sets (MVFS), single-valued fuzzy sets (SVFS), m-polar interval-valued fuzzy sets (m-PIVFS), and fuzzy rough sets (FRS) were made possible by this theory. In 1986, Atanassov expanded the notion of fuzzy sets (FS) to encompass membership and non-membership values, hence improving accuracy. This is known as intuitionistic fuzzy sets (IFS). To solve MCDM difficulties, Zhang and Xu further extended IFS to Pythagorean fuzzy sets (PFS) and offered operational guidelines and techniques for making decisions[25].

Neutrosophic sets (NS), first proposed by Smarandache[26], [27] in 1998, are a novel approach to handling ambiguous, inconsistent, and indeterminate settings. Together with membership and non-membership values (T, I, and F), which are independent of one another, NS also includes indeterminacy values. The notions of bipolar neutrosophic sets (BPNS), single-valued neutrosophic sets (SVNS), multi-valued neutrosophic sets (MVNS), interval-valued neutrosophic sets (IVNS), and multi-valued interval neutrosophic sets (MVINS) were added to NS based on these neutrosophic numbers assigned by decision-makers (DM). These ideas were immediately put to use in practical settings, especially for solving multi-criteria decision-making (MCDM) issues. Scholars have suggested a number of approaches to solve MCDM in the context of different environments.

2. Preliminaries

The fundamental principles of neutrosophic set presented in this section[28]

Definition 1

The set of criteria $K_1^a, K_2^b, \dots, K_n^z$ be a hypersoft u by the product $F, K_1^a \times K_2^b \times \dots \times K_n^z$

$$F: K_1^a \times K_2^b \times \dots \times K_n^z \rightarrow P(u)$$

Definition 2

The form of neutrosophic numbers presented as:

$$F: K_1^a \times K_2^b \times \dots \times K_n^z = \left\{ \begin{array}{l} (u, T_k(u), I_k(u), F_k(u)) \\ |u \in U, \\ k \in (F: K_1^a \times K_2^b \times \dots \times K_n^z) \end{array} \right\}$$

$$T_k(u), I_k(u), F_k(u) \subseteq [0,1]$$

Definition 3

The interval valued number can be presented as:

$$F: K_1^a \times K_2^b \times \dots \times K_n^z = \left\{ \begin{array}{l} (u, T_k(u), I_k(u), F_k(u)) \\ |u \in U, \\ k \in (F: K_1^a \times K_2^b \times \dots \times K_n^z) \end{array} \right\}$$

$$0 \leq \sup(T_k(u)) + \sup(I_k(u)) + \sup(F_k(u)) \leq 3$$

Definition 4

The power set presented as a mapping from the product of criteria as:

$$\left\{ \begin{array}{l} F: K_1^a \times K_2^b \times \dots \times K_n^z \rightarrow P(u) \\ F: K_1^a \times K_2^b \times \dots \times K_n^z = (u, T_k^i(u), I_k^i(u), F_k^i(u)) \end{array} \right\}$$

$$0 \leq \sum_{i=1}^a T_k^i(u) + \sum_{j=1}^b I_k^j(u) + \sum_{l=1}^c T_k^l(u) \leq 3$$

Definition 5

The multi-polar interval valued neutrosophic hypersoft set (m-PIVNHSs) presented as:

Let u and N two m-PIVNHSs and some operations presented as:

$$h_1^{\xi^c} = \{u_1, N_1\}$$

$$h_1^{\xi^c} \vee h_2^{\xi^c} = \{\max\{u_1, u_2\}, \min\{N_1, N_2\}\}$$

$$h_1^{\xi^c} \wedge h_2^{\xi^c} = \{\min\{u_1, u_2\}, \max\{N_1, N_2\}\}$$

$$h_1^{\xi^c} \oplus h_2^{\xi^c} = \left\{ \sqrt{u_1^2 + u_2^2 - u_1^2 u_2^2}, N_1 N_2 \right\}$$

$$\begin{aligned}
 h_1^{\xi^c} \otimes h_2^{\xi^c} &= \left\{ u_1 u_2 \sqrt{N_1^2 + N_2^2 - N_1^2 N_2^2} \right\} \\
 \wedge h_1^{\xi^c} &= \sqrt{1 - (1 - u_1^2)^\wedge}, N_1^\wedge \\
 h_1^{\xi^\wedge} &= U_1^\wedge, \sqrt{1 - (1 - N_1^2)^\wedge}
 \end{aligned}$$

3. Problem Definition

This study proposed an MCDM model with the interval valued neutrosophic set for evaluating natural gas automobiles. This study uses different criteria and alternatives. The criteria are used in this study organized as[29]–[32]:

1. **Vehicle Availability:** The availability of natural gas automobiles is a crucial criterion. It includes the accessibility of natural gas fueling infrastructure and the availability of various vehicle models from multiple manufacturers.
2. **Fuel Efficiency:** Natural gas automobiles should exhibit high fuel efficiency to maximize the mileage per unit of natural gas consumed. This criterion ensures that the vehicle can travel longer distances on a single fill-up, reducing the need for frequent refueling.
3. **Emissions:** One of the significant advantages of natural gas automobiles is their reduced emissions compared to conventional gasoline or diesel vehicles. Criteria for natural gas automobiles include meeting stringent emissions standards and contributing to lower greenhouse gas emissions and air pollution levels.
4. **Performance:** Natural gas automobiles should provide satisfactory performance in terms of acceleration, top speed, and overall driving experience. The vehicle's power and torque output should meet the expectations of drivers.
5. **Safety:** Safety is critical for any automobile, including natural gas vehicles. The vehicle should meet or exceed safety standards and incorporate advanced safety features to protect occupants during collision or other emergencies.
6. **Range:** The range of a natural gas automobile refers to the distance it can travel on a full tank of natural gas. A higher range allows drivers to cover longer distances without frequent refueling, enhancing convenience and practicality.
7. **Cost:** The cost of purchasing, operating, and maintaining a natural gas automobile is an essential criterion for consumers. It includes the initial purchase price, fuel costs, maintenance expenses, insurance premiums, and potential government incentives or subsidies.
8. **Refuelling Infrastructure:** The availability and accessibility of natural gas refueling stations are crucial criteria for natural gas automobiles. A well-developed refueling infrastructure ensures drivers can easily find refueling stations and eliminates concerns about running out of fuel during journeys.
9. **Durability and Reliability:** Natural gas automobiles should demonstrate durability and reliability in various driving conditions and climates. This criterion ensures that the vehicle can withstand regular use and deliver consistent performance over an extended period.
10. **Consumer Acceptance:** Consumer acceptance and perception of natural gas automobiles play a role in widespread adoption. Factors such as public awareness, perceived benefits, and ease of use contribute to the overall criteria for natural gas vehicles.

By considering these criteria, consumers and policymakers can make informed decisions regarding adopting and promoting natural gas automobiles. These vehicles offer the potential for reduced emissions, increased energy independence, and diversification of the transportation fuel mix.

3. The Range of Value Technique (ROV)[33]–[38]

Figure 1 shows the stage of the ROV method.

Stage 1. Create the decision matrix

Stage 2. Normalize the decision matrix

For positive and negative criteria, the normalized decision matrix is computed

$$r_{ij}^+ = \frac{o_{ij} - \min(o_{ij})}{\max(o_{ij}) - \min(o_{ij})} \tag{1}$$

$$r_{ij}^- = \frac{\max(o_{ij}) - o_{ij}}{\max(o_{ij}) - \min(o_{ij})} \tag{2}$$

Stage 3. Compute the values of e_i^+, e_i^-

$$e_i^+ = \sum_{j=1}^n r_{ij}^+ w_j \tag{3}$$

$$e_i^- = \sum_{j=1}^n r_{ij}^- w_j \tag{4}$$

Stage 4. Rank the alternatives

$$e_i = \frac{e_i^+ + e_i^-}{2} \tag{5}$$

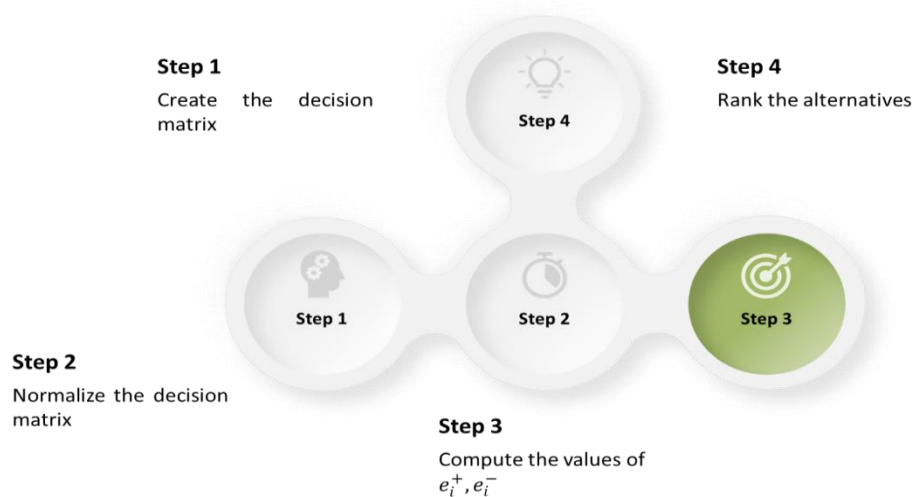


Figure 1: The steps of the proposed model.

4. Results

We proposed a decision-making model for evaluating natural gas automobiles. We used ten criteria and 16 alternatives in this study. The experts evaluated the criteria and alternatives on a scale between 1 and 9. The criteria weights are computed by the mean method to analyze the criteria. Figure 2 shows the criteria weights in this study.

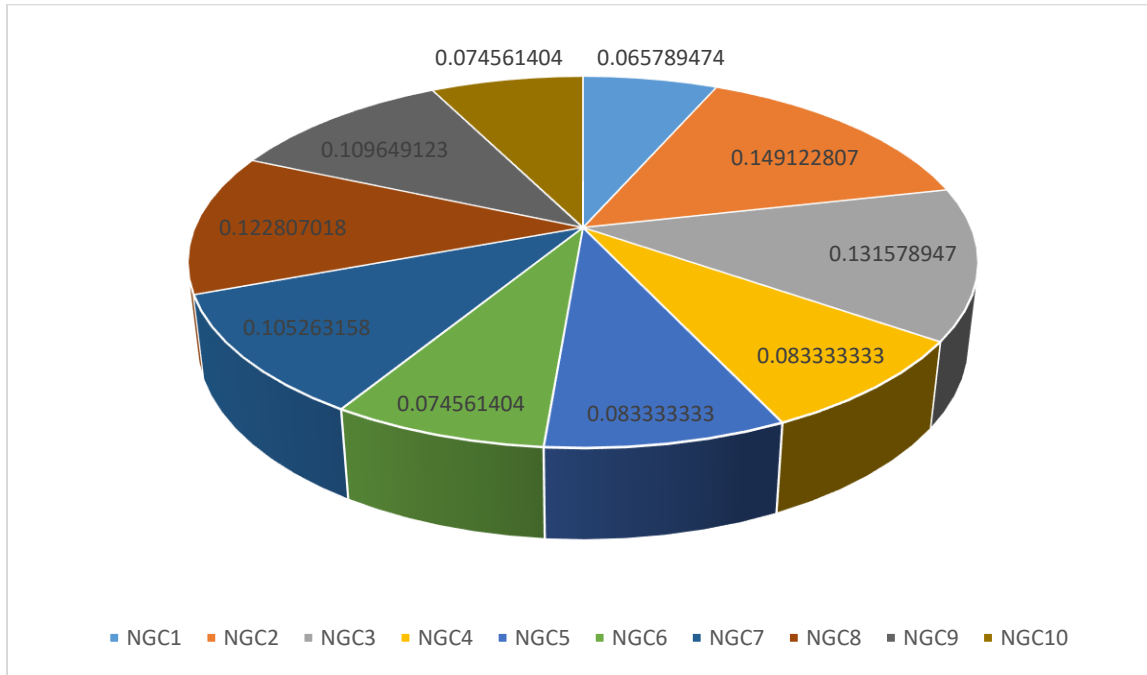


Figure 2: The criteria weights of natural gas automobiles.

Stage 1. Create the decision matrix

Stage 2. Normalize the decision matrix by Eqs. (1 and 2)

Table 1: The normalization decision matrix.

	NGC ₁	NGC ₂	NGC ₃	NGC ₄	NGC ₅	NGC ₆	NGC ₇	NGC ₈	NGC ₉	NGC ₁₀
NGA ₁	3.714286	7.714286	6.714286	2.714286	4.714286	5.714286	8.714286	7.714286	6.714286	5.714286
NGA ₂	5.714286	8.714286	7.714286	6.714286	3.714286	4.714286	5.714286	1.714286	2.714286	4.714286

NGA ₁₃	NGA ₁₂	NGA ₁₁	NGA ₁₀	NGA ₉	NGA ₈	NGA ₇	NGA ₆	NGA ₅	NGA ₄	NGA ₃
8.714286	7.714286	6.714286	3.714286	4.714286	5.714286	8.714286	7.714286	4.714286	1.714286	2.714286
4.714286	5.714286	6.714286	7.714286	8.714286	1.714286	2.714286	5.714286	6.714286	7.714286	8.714286
7.714286	1.714286	6.714286	3.714286	4.714286	5.714286	8.714286	6.714286	7.714286	8.714286	5.714286
1.714286	6.714286	7.714286	8.714286	7.714286	6.714286	7.714286	8.714286	8.714286	4.714286	3.714286
3.714286	5.714286	4.714286	3.714286	5.714286	8.714286	6.714286	1.714286	2.714286	4.714286	4.714286
4.714286	2.714286	3.714286	6.714286	7.714286	8.714286	4.714286	3.714286	5.714286	1.714286	3.714286
5.714286	6.714286	7.714286	8.714286	8.714286	1.714286	7.714286	7.714286	8.714286	2.714286	5.714286
7.714286	8.714286	3.714286	5.714286	4.714286	3.714286	7.714286	6.714286	7.714286	8.714286	8.714286
7.714286	8.714286	5.714286	1.714286	4.714286	3.714286	6.714286	7.714286	4.714286	8.714286	5.714286
7.714286	4.714286	8.714286	7.714286	6.714286	8.714286	7.714286	4.714286	5.714286	1.714286	3.714286

	NGA ₁₆	NGA ₁₅	NGA ₁₄
	6.714286	7.714286	6.714286
	7.714286	4.714286	3.714286
	8.714286	5.714286	8.714286
	5.714286	6.714286	3.714286
	4.714286	7.714286	4.714286
	3.714286	8.714286	5.714286
	6.714286	7.714286	8.714286
	7.714286	8.714286	6.714286
	8.714286	8.714286	4.714286
	5.714286	4.714286	6.714286

Stage 3. Compute the values of e_i^+, e_i^- by Eqs. (3 and 4) a shown in Table 2.

Table 2: The values of e_i^+, e_i^-

	NGC ₁	NGC ₂	NGC ₃	NGC ₄	NGC ₅	NGC ₆	NGC ₇	NGC ₈	NGC ₉	NGC ₁₀
NGA ₆	0.507519	0.85213	0.883459	0.72619	0.142857	0.276942	0.81203	0.824561	0.845865	0.351504
NGA ₅	0.31015	1.001253	1.015038	0.72619	0.22619	0.426065	0.917293	0.947368	0.516917	0.426065
NGA ₄	0.112782	1.150376	1.146617	0.392857	0.392857	0.12782	0.285714	1.070175	0.955514	0.12782
NGA ₃	0.178571	1.299499	0.75188	0.309524	0.392857	0.276942	0.601504	1.070175	0.626566	0.276942
NGA ₂	0.37594	1.299499	1.015038	0.559524	0.309524	0.351504	0.601504	0.210526	0.297619	0.351504
NGA ₁	0.244361	1.150376	0.883459	0.22619	0.392857	0.426065	0.917293	0.947368	0.736216	0.426065

	NGA ₁₆	NGA ₁₅	NGA ₁₄	NGA ₁₃	NGA ₁₂	NGA ₁₁	NGA ₁₀	NGA ₉	NGA ₈	NGA ₇
	0.441729	0.507519	0.441729	0.573308	0.507519	0.441729	0.244361	0.31015	0.37594	0.573308
	1.150376	0.703008	0.553885	0.703008	0.85213	1.001253	1.150376	1.299499	0.255639	0.404762
	1.146617	0.75188	1.146617	1.015038	0.225564	0.883459	0.488722	0.620301	0.75188	1.146617
	0.47619	0.559524	0.309524	0.142857	0.559524	0.642857	0.72619	0.642857	0.559524	0.642857
	0.392857	0.642857	0.392857	0.309524	0.47619	0.392857	0.309524	0.47619	0.72619	0.559524
	0.276942	0.649749	0.426065	0.351504	0.202381	0.276942	0.500627	0.575188	0.649749	0.351504
	0.706767	0.81203	0.917293	0.601504	0.706767	0.81203	0.917293	0.917293	0.180451	0.81203
	0.947368	1.070175	0.824561	0.947368	1.070175	0.45614	0.701754	0.578947	0.45614	0.947368
	0.955514	0.955514	0.516917	0.845865	0.955514	0.626566	0.18797	0.516917	0.407268	0.736216
	0.426065	0.351504	0.500627	0.575188	0.351504	0.649749	0.575188	0.500627	0.649749	0.575188

Stage 4. Rank the alternatives as shown in Figure 3. Alternative 15 has the highest rank and alternative 8 has the lowest rank.



Figure 3: The rank of alternatives.

We change the weights of the criteria to show whether the rank of the alternative is stable or not. There are ten cases in weights of criteria as shown in Figure 4. We compute the rank of alternatives after changing the weights of criteria as shown in Figure 5. The results show a stable rank.

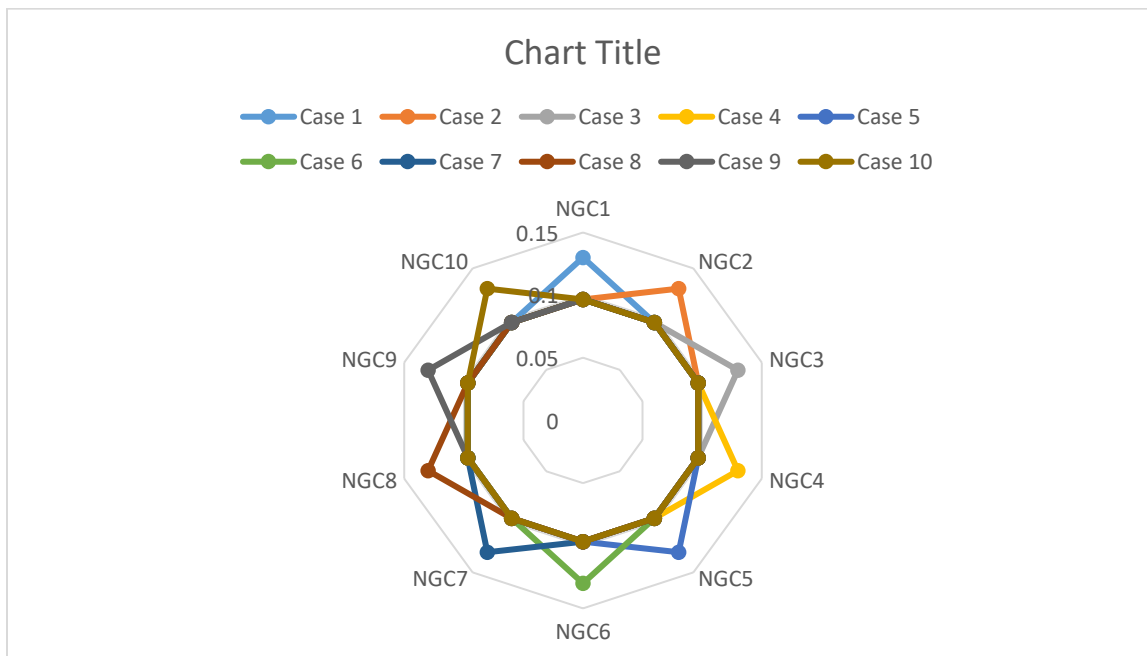


Figure 4: The ten cases in criteria weights.

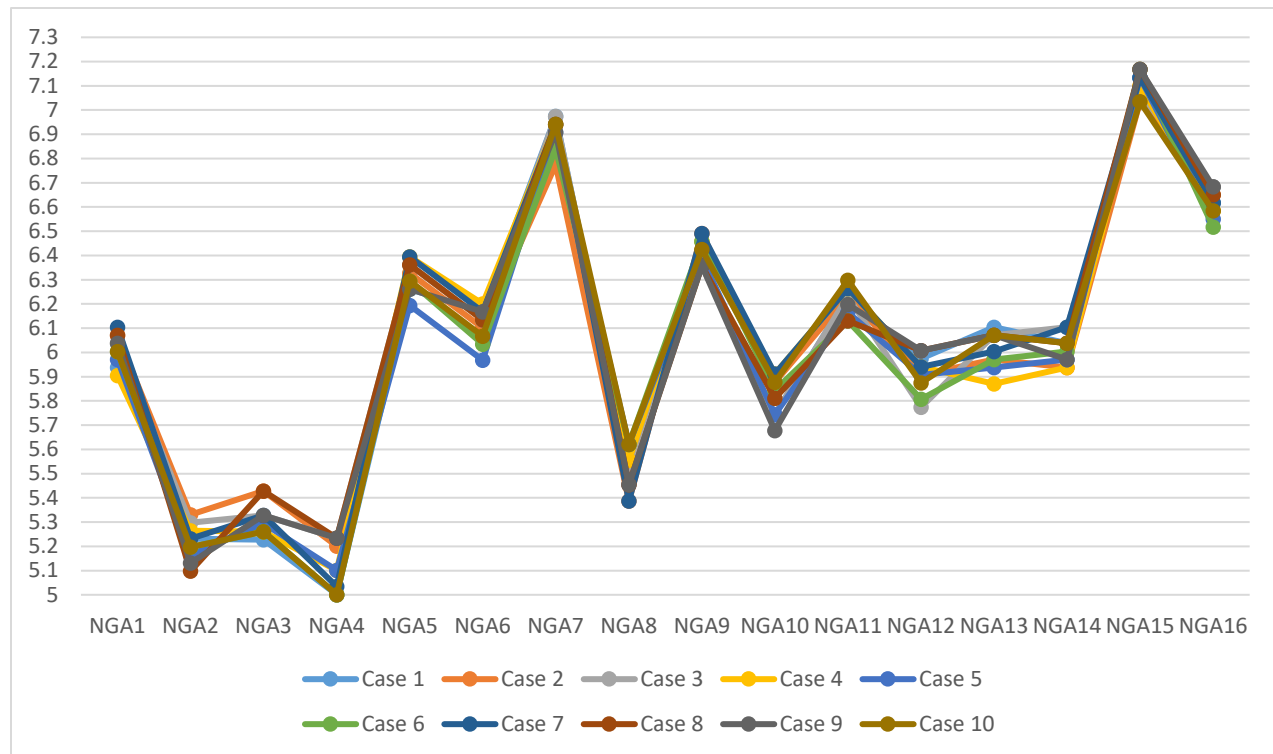


Figure 5: The different ranks of alternatives.

5. Conclusions

Evaluating natural gas automobiles underscores their potential as a promising alternative in the transportation sector. Technologically, NGVs showcase lower emissions of harmful pollutants, aligning with environmental objectives to reduce air pollution and mitigate climate change impacts. Economic analyses highlight the potential for cost savings, particularly in regions with established natural gas infrastructure and favorable pricing. However, challenges persist, including limited refueling infrastructure, reduced driving range compared to conventional vehicles, and upfront costs associated with vehicle conversion or purchase. Addressing these challenges requires concerted efforts in infrastructure development, technological advancements, and policy support. Investments in refueling infrastructure, research and development for advanced NGV technologies, and supportive policies such as tax incentives or subsidies can accelerate the adoption of natural gas automobiles. Moreover, collaboration among stakeholders, including governments, industry players, and research institutions, is essential to address market barriers and promote a smoother transition towards natural gas as a viable fuel option in the transportation sector. This study used the MCDM model to evaluate natural gas automobiles and analyze the criteria. The Range of Value Technique (ROV) method was used to rank the alternatives. We used ten criteria and 16 options in this study. The ROV method integrated with the interval valued neutrosophic set to deal with uncertainty and vague information. The sensitivity analysis shows the stability of the results.

References

- [1] Z. Wang, D. Zhang, Y. Fang, M. Song, Z. Gong, and L. Feng, "Experimental and numerical investigation of the auto-ignition characteristics of cylinder oil droplets under low-speed two-stroke natural gas engines in-cylinder conditions," *Fuel*, vol. 329, p. 125498, 2022.
- [2] G. J. Hampson, "High efficiency natural gas engine combustion using controlled auto-ignition," in *Internal Combustion Engine Division Fall Technical Conference*, American Society of Mechanical Engineers, 2019, p. V001T03A019.

- [3] Z. Gong, M. Hu, Y. Fang, D. Zhang, and L. Feng, "Mechanism study of natural gas pre-ignition induced by the auto-ignition of lubricating oil," *Fuel*, vol. 315, p. 123286, 2022.
- [4] R. G. Papagiannakis, C. D. Rakopoulos, D. T. Hountalas, and D. C. Rakopoulos, "Emission characteristics of high speed, dual fuel, compression ignition engine operating in a wide range of natural gas/diesel fuel proportions," *Fuel*, vol. 89, no. 7, pp. 1397–1406, 2010.
- [5] P. Yi, W. Long, L. Feng, L. Chen, J. Cui, and W. Gong, "Investigation of evaporation and auto-ignition of isolated lubricating oil droplets in natural gas engine in-cylinder conditions," *Fuel*, vol. 235, pp. 1172–1183, 2019.
- [6] T. Andersen, H. M. Kvamsdal, and O. Bolland, "Gas turbine combined cycle with CO₂-capture using auto-thermal reforming of natural gas," in *Turbo Expo: Power for Land, Sea, and Air*, American Society of Mechanical Engineers, 2000, p. V002T04A013.
- [7] M. I. Khan, T. Yasmin, and A. Shakoor, "Technical overview of compressed natural gas (CNG) as a transportation fuel," *Renewable and Sustainable Energy Reviews*, vol. 51, pp. 785–797, 2015.
- [8] N. Jaouen, L. Vervisch, and P. Domingo, "Auto-thermal reforming (ATR) of natural gas: An automated derivation of optimised reduced chemical schemes," *Proceedings of the Combustion Institute*, vol. 36, no. 3, pp. 3321–3330, 2017.
- [9] P. U. Ricklin, A. Kazakov, F. L. Dryer, S. C. Kong, and R. D. Reitz, "The effects of NO_x addition on the auto ignition behavior of natural gas under HCCI conditions," *SAE Transactions*, pp. 788–798, 2002.
- [10] N. Jamsran and O. Lim, "Effects of EGR and boosting on the auto-ignition characteristics of HCCI combustion fueled with natural gas," *Journal of Natural Gas Science and Engineering*, vol. 35, pp. 1015–1024, 2016.
- [11] R. G. Papagiannakis and D. T. Hountalas, "Experimental investigation concerning the effect of natural gas percentage on performance and emissions of a DI dual fuel diesel engine," *Applied Thermal Engineering*, vol. 23, no. 3, pp. 353–365, 2003.
- [12] C. C. O. Reynolds, M. Kandlikar, and M. G. Badami, "Determinants of PM and GHG emissions from natural gas-fueled auto-rickshaws in Delhi," *Transportation Research Part D: Transport and Environment*, vol. 16, no. 2, pp. 160–165, 2011.
- [13] A. A. E.-S. Mohamed, S. Panigrahy, A. B. Sahu, G. Bourque, and H. J. Curran, "An experimental and kinetic modeling study of the auto-ignition of natural gas blends containing C₁–C₇ alkanes," *Proceedings of the Combustion Institute*, vol. 38, no. 1, pp. 365–373, 2021.
- [14] M. Mehrpooya, B. Ghorbani, S. A. Mousavi, and A. Zaitsev, "Proposal and assessment of a new integrated liquefied natural gas generation process with auto-Cascade refrigeration (exergy and economic analyses)," *Sustainable Energy Technologies and Assessments*, vol. 40, p. 100728, 2020.
- [15] R. J. Farrauto, M. Deeba, and S. Alerasool, "Gasoline automobile catalysis and its historical journey to cleaner air," *Nature Catalysis*, vol. 2, no. 7, pp. 603–613, 2019.
- [16] A. V. Rossokhin and A. A. Anfilatov, "The effect of the use of natural gas on the emissivity of a flame in a cylinder of an automobile diesel engine," in *IOP Conference Series: Materials Science and Engineering*, IOP Publishing, 2020, p. 62065.
- [17] A. A. Hairuddin, T. Yusaf, and A. P. Wandel, "A review of hydrogen and natural gas addition in diesel HCCI engines," *Renewable and Sustainable Energy Reviews*, vol. 32, pp. 739–761, 2014.
- [18] S. M. Bayliff, "Evaluation of controlled end gas auto ignition with exhaust gas recirculation in a stoichiometric, spark ignited, natural gas engine." Colorado State University, 2020.
- [19] S. Bayliff *et al.*, "Controlled end gas auto ignition with exhaust gas recirculation on a stoichiometric, spark

- ignited, natural gas engine,” in *Internal Combustion Engine Division Fall Technical Conference*, American Society of Mechanical Engineers, 2020, p. V001T03A011.
- [20] H. L. MacLean and L. B. Lave, “Evaluating automobile fuel/propulsion system technologies,” *Progress in energy and combustion science*, vol. 29, no. 1, pp. 1–69, 2003.
- [21] M. Abouhawwash, M. Jameel, and S. S. Askar, “Multi-Criteria Decision Making Model for Analysis Hydrogen Production for Economic Feasibility and Sustainable Energy,” *Multicriteria Algorithms with Applications*, vol. 1, no. 1, pp. 31–41, 2023.
- [22] L. A. Zadeh, “Fuzzy logic,” *Computer*, vol. 21, no. 4, pp. 83–93, 1988.
- [23] L. A. Zadeh, “On fuzzy algorithms,” in *fuzzy sets, fuzzy logic, and fuzzy systems: selected papers By Lotfi A Zadeh*, World Scientific, 1996, pp. 127–147.
- [24] K. M. Sallam and A. W. Mohamed, “Single Valued Neutrosophic Sets for Assessment Quality of Suppliers under Uncertainty Environment,” *Multicriteria Algorithms with Applications*, vol. 1, no. 1, pp. 1–10, 2023.
- [25] N. Saleem, U. Ishtiaq, K. Ahmad, S. Sessa, and F. Di Martino, “Fixed Point Results in Neutrosophic Rectangular Extended b-Metric Spaces,” *Neutrosophic Systems with Applications*, vol. 9, pp. 48–80, 2023.
- [26] F. Smarandache, *A unifying field in logics: neutrosophic logic. Neutrosophy, neutrosophic set, neutrosophic probability: neutrosophic logic. Neutrosophy, neutrosophic set, neutrosophic probability*. Infinite Study, 2005.
- [27] F. Smarandache and S. Pramanik, *New trends in neutrosophic theory and applications*, vol. 1. Infinite Study, 2016.
- [28] M. Saqlain, H. Garg, P. Kumam, and W. Kumam, “Uncertainty and decision-making with multi-polar interval-valued neutrosophic hypersoft set: A distance, similarity measure and machine learning approach,” *Alexandria Engineering Journal*, vol. 84, pp. 323–332, 2023.
- [29] H. Zhang and D. Yin, “The oil and gas industry and the development of the natural Gas automobile industry,” in *IOP Conference Series: Earth and Environmental Science*, IOP Publishing, 2019, p. 22043.
- [30] DADAS, H. Olgun, N. (2023). Neutrosophic Soft n-Topological Spaces: A Framework for Decision-Making Problems. *Galoitica: Journal of Mathematical Structures and Applications*, 9(2), 15-21.
- [31] H. L. MacLean, L. B. Lave, R. Lankey, and S. Joshi, “A life-cycle comparison of alternative automobile fuels,” *Journal of the air & waste management association*, vol. 50, no. 10, pp. 1769–1779, 2000.
- [32] J. de Castro, R. Rivera-Tinoco, and C. Bouallou, “Hydrogen production from natural gas: auto-thermal reforming and CO₂ capture,” *CHEMICAL ENGINEERING*, vol. 21, 2010.
- [33] E. K. Zavadskas, Z. Nunić, Ž. Stjepanović, and O. Prentkovskis, “A novel rough range of value method (R-ROV) for selecting automatically guided vehicles (AGVs),” *Studies in Informatics and Control*, vol. 27, no. 4, pp. 385–394, 2018.
- [34] A. Mitra, “Grading of raw jute fibres using criteria importance through intercriteria correlation (CRITIC) and range of value (ROV) approach of multi-criteria decision making,” *Journal of Natural Fibers*, vol. 19, no. 14, pp. 7517–7533, 2022.
- [35] N. ERSOY, “Selecting the best normalization technique for ROV method: Towards a real life application,” *Gazi University Journal of Science*, vol. 34, no. 2, pp. 592–609, 2021.
- [36] F. A. Azis, M. S. M. Aras, M. Z. A. Rashid, M. N. Othman, and S. S. Abdullah, “Problem identification for underwater remotely operated vehicle (ROV): A case study,” *Procedia Engineering*, vol. 41, pp. 554–560, 2012.
- [37] K. Karahan and G. C. YALÇIN, “Assessing Railway Transportation Performance of European Countries

with CRITIC and ROV Techniques,” *Demiryolu Mühendisliği*, no. 17, pp. 93–106, 2023.

- [38] A. T. Işık and E. A. Adalı, “The decision-making approach based on the combination of entropy and ROV methods for the apple selection problem,” *European Journal of Interdisciplinary Studies*, vol. 3, no. 3, pp. 80–86, 2017.